


Design possibilities and limits of Windoor System 1000 with a shaped upper section can be supplied with either fixed glass, folding glass or sliding glass

WINDOOR®

Height up to approx. 3.3m*

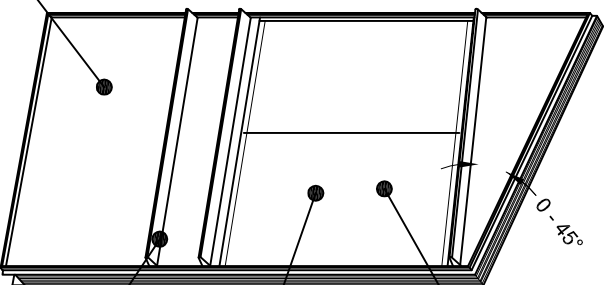

Width between 0.25m and approx. 3.0m *

With folding glass the min width is 0.35m.

With sliding glass the min width is 0.9m.

Railing section.

The railing section can be supplied in upto 3 horizontal sections.

The horizontal sections can be divided with vertical mullions.

The maximum width of any section is 3m, where the width exceeds this vertical mullions need to be incorporated.

The infill material can be 4.0mm - 4.8mm or 6.0mm - 6.8mm or 20 mm thick.

The width to height ratio of glass infill must not exceed 1:10.

Typical infill options:

6mm high density coloured Formica board

6.38mm opal laminated float glass

6.38mm clear laminated float glass

Folding glass

Folding glass can be supplied unframed in 6mm, 8mm or 10mm toughened glass or framed in 20mm thick double glazed sealed unit.

Height of the opening section is between: 600mm & 1800mm

With of the opening section is between: 500mm & 900mm

Height of a side hung glass is between: 400mm & 1800mm

Width of a side hung glass is between: 250mm - 1000mm

Where a double glazed unit is selected, the max. height is 1600mm. Height of the opening glass should not be greater than 2.5 times the width.

The element can be supplied with up to 8 folding glasses where the glass is opening in one direction and 10 glasses when opening in both directions.

The element can be supplied with a fixed glass at one or both ends, the rest of the glasses will open in the normal way.

When the glasses open in both directions (single glazed only) the first opening glass is supplied with a sliding pole fitting, the rest of the glasses open in the normal way.

Folding glass (and it's frame) needs to be able to accommodate the imposed wind load.

Sliding glass

Sliding glass is supplied as 6mm toughened glass.

The element can be supplied with 2, 3 or 4 sliding glasses.

Each glass can be supplied complete with a brush strip seal.

Height of the opening glass: 150mm - 1600mm**

Width of the opening glass: 400 mm - 1200 mm

Height of the opening glass is not normally greater than 2.5 times the width.

** dependant upon wind load

Aluminium extrusions

The Windoor System 1000 can use profiles of different sizes and strengths. Profile dimensions are dependant upon the size of the element and the load imposed on the system.

* Height and width dimensions

The maximum height and width dimension of the element is subject to the wind and service loads imposed on the system.